


SK式スイベルジョイント

サイズ：1/4"、3/8"、1/2"、3/4"、1"
 常圧：20.6Mpa 13.8Mpa
 材質：SS41

別途仕様でSUS304製もあります。
 常圧：1/4・3/8・1/2 7.0Mpa 3/4・1 5.0Mpa


SKL-30 (RC×RC)



単位：mm

品番	Rc雌	Rc雄	L	A	B	φd	φd1	□E	HEX
SKL-30-6	1/4	1/4	47	33	18	5	19	19	19
SKL-30-9	3/8	3/8	54	36	18	7	24	23	22
SKL-30-12	1/2	1/2	63	42	26	10	30	30	27
SKL-30-19	3/4	3/4	71	46	30	16	36	36	36
SKL-30-25	1	1	76	48	36	21	40	45	41


SKL-31 (RC×G)



単位：mm

品番	Rc雌	G雄	L	A	B	C	φd	□E	HEX
SKL-31-6	1/4	1/4	46	33	16	25	5	14	19
SKL-31-9	3/8	3/8	52	36	18	27	7	20	22
SKL-31-12	1/2	1/2	60	42	20	32	10	22	27
SKL-31-19	3/4	3/4	68	46	22	37	16	30	36
SKL-31-25	1	1	74	48	23	41	21	36	41


SKL-32 (RC×G)



単位：mm

品番	Rc雌	G雄	L	A	B	C	φd	□E	HEX
SKL-32-6	1/4	1/4	46	33	13	21	5	14	19
SKL-32-9	3/8	3/8	52	35	15	25	7	20	22
SKL-32-12	1/2	1/2	60	42	17	29	10	22	27
SKL-32-19	3/4	3/4	68	46	20	35	16	30	36
SKL-32-25	1	1	74	48	22	40	21	36	41


SKL-33 (R×G)



単位：mm

品番	R雄	G雄	L	A	B	C	φd	□E	HEX
SKL-33-6	1/4	1/4	52	13	16	24	5	14	19
SKL-33-9	3/8	3/8	57	15	18	28	7	20	22
SKL-33-12	1/2	1/2	66	18	20	32	10	22	27
SKL-33-19	3/4	3/4	74	20	22	37	16	30	36
SKL-33-25	1	1	82	22	23	41	21	36	41


SKL-34 (R×G)



単位：mm

品番	R雄	G雄	L	A	B	C	φd	□E	HEX
SKL-34-6	1/4	1/4	52	13	13	21	5	14	19
SKL-34-9	3/8	3/8	57	15	15	25	7	20	22
SKL-34-12	1/2	1/2	66	18	17	29	10	24	27
SKL-34-19	3/4	3/4	74	20	20	35	16	30	36
SKL-34-25	1	1	82	22	22	40	21	36	41


SKL-35 (R×RC)



単位：mm

品番	R雄	Rc雌	L	A	B	φd	φd1	□E	HEX
SKL-35-6	1/4	1/4	53	13	18	5	19	19	19
SKL-35-9	3/8	3/8	59	15	18	7	23	24	22
SKL-35-12	1/2	1/2	69	18	26	10	30	30	27
SKL-35-19	3/4	3/4	77	20	30	16	36	36	36
SKL-35-25	1	1	84	22	36	21	40	40	41


SK-10 (R×RC)



単位：mm

品番	R雄	Rc雌	L	A	B	C	φd	HEX
SK-10-6	1/4	1/4	61	39	13	17	5	19
SK-10-9	3/8	3/8	66	41	15	19	7	22
SK-10-12	1/2	1/2	76	48	18	22	10	27
SK-10-19	3/4	3/4	84	52	20	25	16	36
SK-10-25	1	1	90	56	22	27	21	41

SK-11 (G×G)



(R×R) (G×R) もあります
 Rは30°シートなし

単位：mm


品番	R・G	R・G	L	A	B	C	φd	HEX
SK-11-6	1/4	1/4	65	13	8	13	5	19
SK-11-9	3/8	3/8	70	15	8	15	7	22
SK-11-12	1/2	1/2	82	18	10	18	10	27
SK-11-19	3/4	3/4	91	20	12	20	16	36
SK-11-25	1	1	97	22	12	22	21	41

SK式スイベルジョイント

サイズ：1/4"、3/8"、1/2"、3/4"、1"
 常圧：20.6Mpa 13.8Mpa
 材質：SS41

別途仕様でSUS304製もあります。
 常圧：1/4・3/8・1/2 7.0Mpa 3/4・1 5.0Mpa


SK-12 (RC×RC)

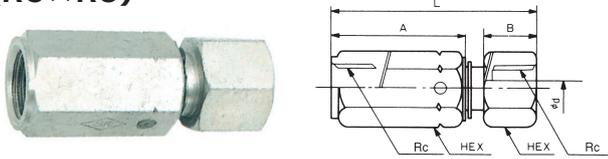

単位：mm

品番	Rc雌	Rc雌	L	A	B	φd	HEX
SK-12-6	1/4	1/4	55	33	17	5	19
SK-12-9	3/8	3/8	61	36	19	7	22
SK-12-12	1/2	1/2	70	42	22	10	27
SK-12-19	3/4	3/4	78	46	25	16	36
SK-12-25	1	1	82	48	27	21	41


SK-13 (R×G)

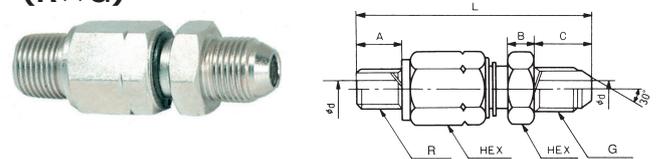

単位：mm

品番	R雄	G雄	L	A	B	C	φd	HEX
SK-13-6	1/4	1/4	68	13	8	16	5	19
SK-13-9	3/8	3/8	72	15	8	18	7	22
SK-13-12	1/2	1/2	84	18	10	20	10	27
SK-13-19	3/4	3/4	92	20	12	22	16	36
SK-13-25	1	1	98	22	12	23	21	41


SK-14 (RC×G)

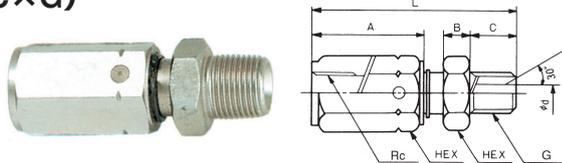

単位：mm

品番	Rc雌	G雄	L	A	B	C	φd	HEX
SK-14-6	1/4	1/4	59	33	8	13	5	19
SK-14-9	3/8	3/8	65	36	8	15	7	22
SK-14-12	1/2	1/2	76	42	10	18	10	27
SK-14-19	3/4	3/4	85	46	12	20	16	36
SK-14-25	1	1	89	48	12	22	21	41

SK-15 (RC×G)

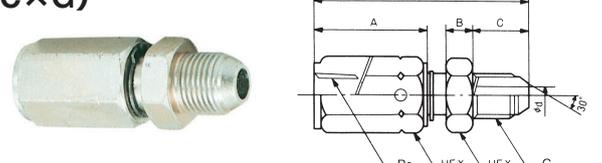


単位：mm

品番	Rc雌	G雄	L	A	B	C	φd	HEX
SK-15-6	1/4	1/4	62	33	8	16	5	19
SK-15-9	3/8	3/8	68	36	8	18	7	22
SK-15-12	1/2	1/2	78	42	10	20	10	27
SK-15-19	3/4	3/4	87	46	12	22	16	36
SK-15-25	1	1	90	48	12	23	21	41

SK式回転アダプター

●スイベルジョイントの特徴

- ①接続位置が任意の方向にとれ、作業性がよい。
- ②ホースのよじれを取り除き、よじれを原因としたホースの損傷を防ぎます。
- ③ストレートタイプ・90度エルボタイプとあり用途に応じて使い分けられます。
- ④加圧状態においても、少ないトルクで360度回転できます。

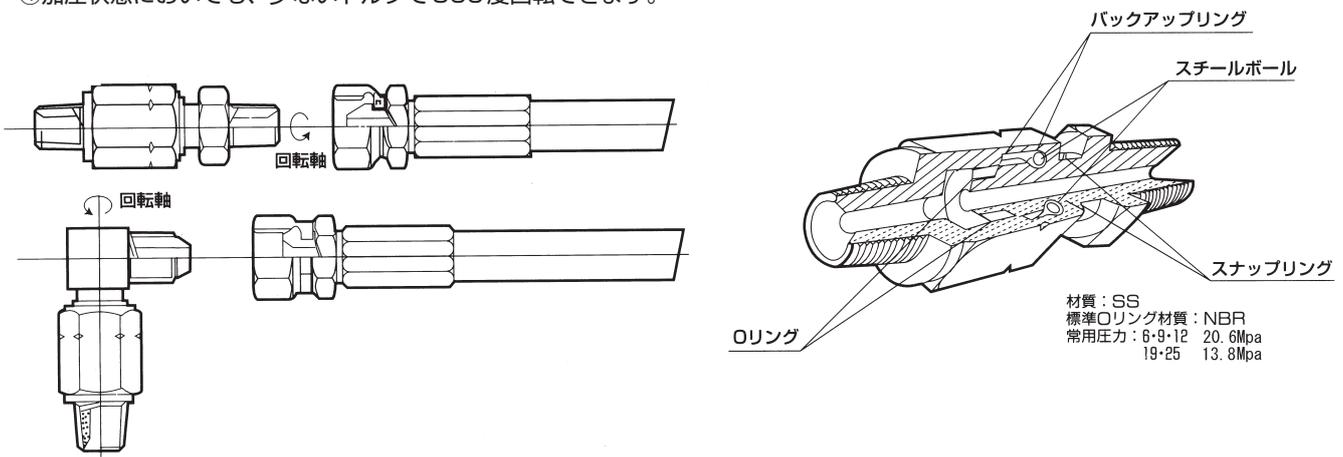

※予告なしに品質・性能・改善のため寸法を変更する事があります。