


TSアダプター



単位：mm

T-16



サイズ	ネジT ₁	ネジT ₂	A	B	dφ	L	HEX
6	G ¼	R ¼	13	8	5.5	38	19
9	G ⅜	R ⅜	15	8	7.0	42	22
12	G ½	R ½	18	10	10.0	50	27
19	G ¾	R ¾	20	12	16.0	56	36
25	G 1	R 1	22	12	21.5	60	41
32	G 1 ¼	R 1 ¼	25	14	27.5	69	50
38	G 1 ½	R 1 ½	25	14	33.0	72	60
50	G 2	R 2	30	17	44.0	83	70


T-18



サイズ	ネジT ₁	ネジT ₂	A	dφ	L	HEX
6	G ¼	Rc ¼	17	5.5	34	19
9	G ⅜	Rc ⅜	19	7.0	38	22
12	G ½	Rc ½	22	10.0	43	27
19	G ¾	Rc ¾	25	16.0	49	36
25	G 1	Rc 1	27	21.5	53	41
32	G 1 ¼	Rc 1 ¼	30	27.5	60	50
38	G 1 ½	Rc 1 ½	30	33.0	63	60
50	G 2	Rc 2	36	44.0	71	70

T06-90

ユニオン90°エルボ




*印及びSUSは受注生産

サイズ	ネジT ₁	ネジT ₂	A	B	C	dφ	E	Hex
6	R ¼	G ¼	27.0	25.0	17	5.5	17	19
9	R ⅜	G ⅜	32.0	30.0	20	7.0	19	22
12	R ½	G ½	36.0	36.0	24	10.0	24	27
19	R ¾	G ¾	43.0	43.0	28	16.0	30	36
25	R 1	G 1	49.0	50.0	32	21.5	36	41
* 32	R 1 ¼	G 1 ¼	60.5	57.5	35	27.5	45	50
* 38	R 1 ½	G 1 ½	65.0	63.0	38	33.0	50	60
* 50	R 2	G 2	75.5	73.5	42	44.0	63	70

T06-45

ユニオン45°エルボ

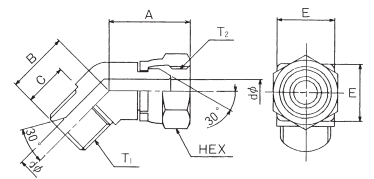


*印及びSUSは受注生産

サイズ	ネジT ₁	ネジT ₂	A	B	C	dφ	E	Hex
6	R ¼	G ¼	24	19	13	5.5	17	19
9	R ⅜	G ⅜	27	22	15	7.0	19	22
12	R ½	G ½	34	27	18	10.0	24	27
19	R ¾	G ¾	41	30	20	16.0	30	36
25	R 1	G 1	46	34	22	21.5	36	41
* 32	R 1 ¼	G 1 ¼	53	38	24	27.5	45	50
* 38	R 1 ½	G 1 ½	58	40	24	33.0	50	60
* 50	R 2	G 2	64	48	28	44.0	63	70

ユニオンストレートUS

1613




接続口金具：SR-04

サイズ	ネジT	A	B	L	dφ	HEX
6	G ¼	16.0	8	41.0	5.5	19
9	G ⅜	17.5	8	44.5	7.0	22
12	G ½	20.0	10	52.0	10.0	27
19	G ¾	21.5	12	57.5	16.0	32
25	G 1	22.5	12	60.5	21.5	41
32	G 1 ¼	27.0	14	71.0	27.5	50
38	G 1 ½	27.0	14	74.0	33.0	60
50	G 2	30.0	17	83.0	44.0	70

ユニオンエルボUL-90

1613



接続口金具：SR-04

サイズ	ネジT	A	B	C	dφ	HEX
6	G ¼	27.0	24.0	16.0	5.5	19
9	G ⅜	32.0	27.5	17.5	7.0	22
12	G ½	36.0	32.0	20.0	10.0	27
19	G ¾	43.0	36.5	21.5	16.0	36
25	G 1	49.0	40.5	22.5	21.5	41
32	G 1 ¼	60.5	49.5	27.0	27.5	50
38	G 1 ½	65.0	52.0	27.0	33.0	60
50	G 2	75.5	61.5	30.0	44.0	70

※予告なしに品質・性能・改善のため寸法を変更する事があります。
(注意) 上記表寸法は、SS41の寸法です。材質により寸法が変わります。